


Top back of switch

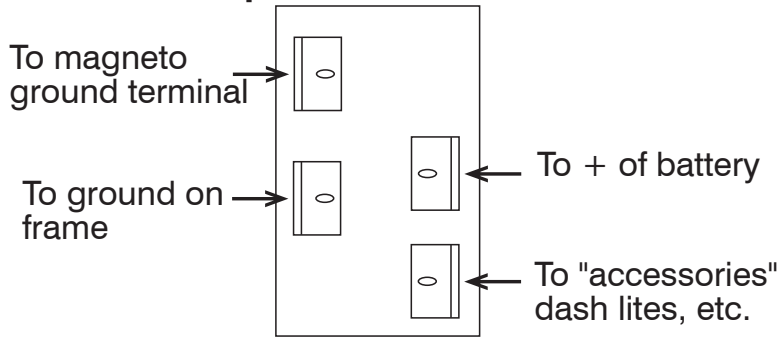


Move switch down to ground mag (kill motor) and shut off accessories. Move switch up to unground mag and turn on accessories.

NOTE: The back side of the switch should be sealed with a good Silacone sealer to prevent moisture from entering the switch. The front is sealed by the weatherproof rubber switch cover. Also coat terminal screws with Silicone sealer to prevent loosening due to vibration.

Southwest Speed

7423 Highway 271 South Fort Smith, AR 72903
(501) 646-6988 (501) 646-5939

Top back of switch

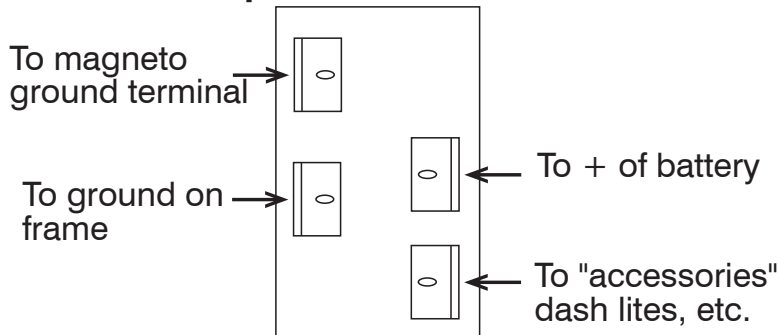


Move switch down to ground mag (kill motor) and shut off accessories. Move switch up to unground mag and turn on accessories.

NOTE: The back side of the switch should be sealed with a good Silacone sealer to prevent moisture from entering the switch. The front is sealed by the weatherproof rubber switch cover. Also coat terminal screws with Silicone sealer to prevent loosening due to vibration.

Southwest Speed

7423 Highway 271 South Fort Smith, AR 72903
(501) 646-6988 (501) 646-5939

Top back of switch

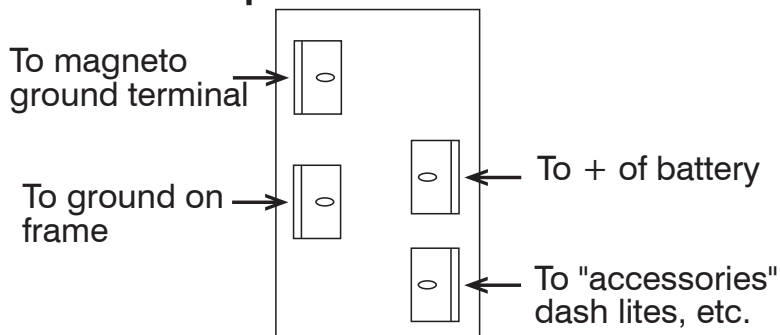

Move switch down to ground mag (kill motor) and shut off accessories. Move switch up to unground mag and turn on accessories.

NOTE: The back side of the switch should be sealed with a good Silacone sealer to prevent moisture from entering the switch. The front is sealed by the weatherproof rubber switch cover. Also coat terminal screws with Silicone sealer to prevent loosening due to vibration.

Southwest Speed

7423 Highway 271 South Fort Smith, AR 72903
(501) 646-6988 (501) 646-5939